



SF 150S



Technical data

Voltage: 120 VAC
 Frequency: 50/60 Hz
 Power: 1.34 Hp
 Rated current: ... 10.9 A
 Max vacuum: 84 in/wg
 Air flow: 90 cfm
 Filter: 2-layer filter (Fine- and Micro-filter),
 with an efficiency of 99,95% for
 particles >0,0003 mm.

Handling

Attach one end of the hose to the inlet pipe of the smoke filter and the other end to the nozzle.

SF 150S is suitable for light soldering.

Maintenance

The SF 150S bottom is used for collecting dust that hasn't reached the filter. The bottom is easily accessible by releasing the quick clamp holding the top and bottom parts together. The bottom must be checked and cleaned regularly.

Changing the filter

Please note that the SF 150S is equipped with an automatic switch that will cut the current supply to the engines when the filter is full. The filter is changed by disconnecting the nut holding it and then replaced with a new one. At the same time the carbon filter is changed.



ALWAYS change the filter if it is full. Cleaning the filter will damage it and may cause engine breakdown.

Service


After 1000-1200 working hours, the engine carbon-brushes must be changed. Your retailer will do that for you.

Trouble shooting

When the filter is full the engines will switch off. After changing filters, the smoke filter should start running again. If the filter doesn't start again a replacement of carbon brushes can be suitable.

Please contact your retailer for service.

Exploded view

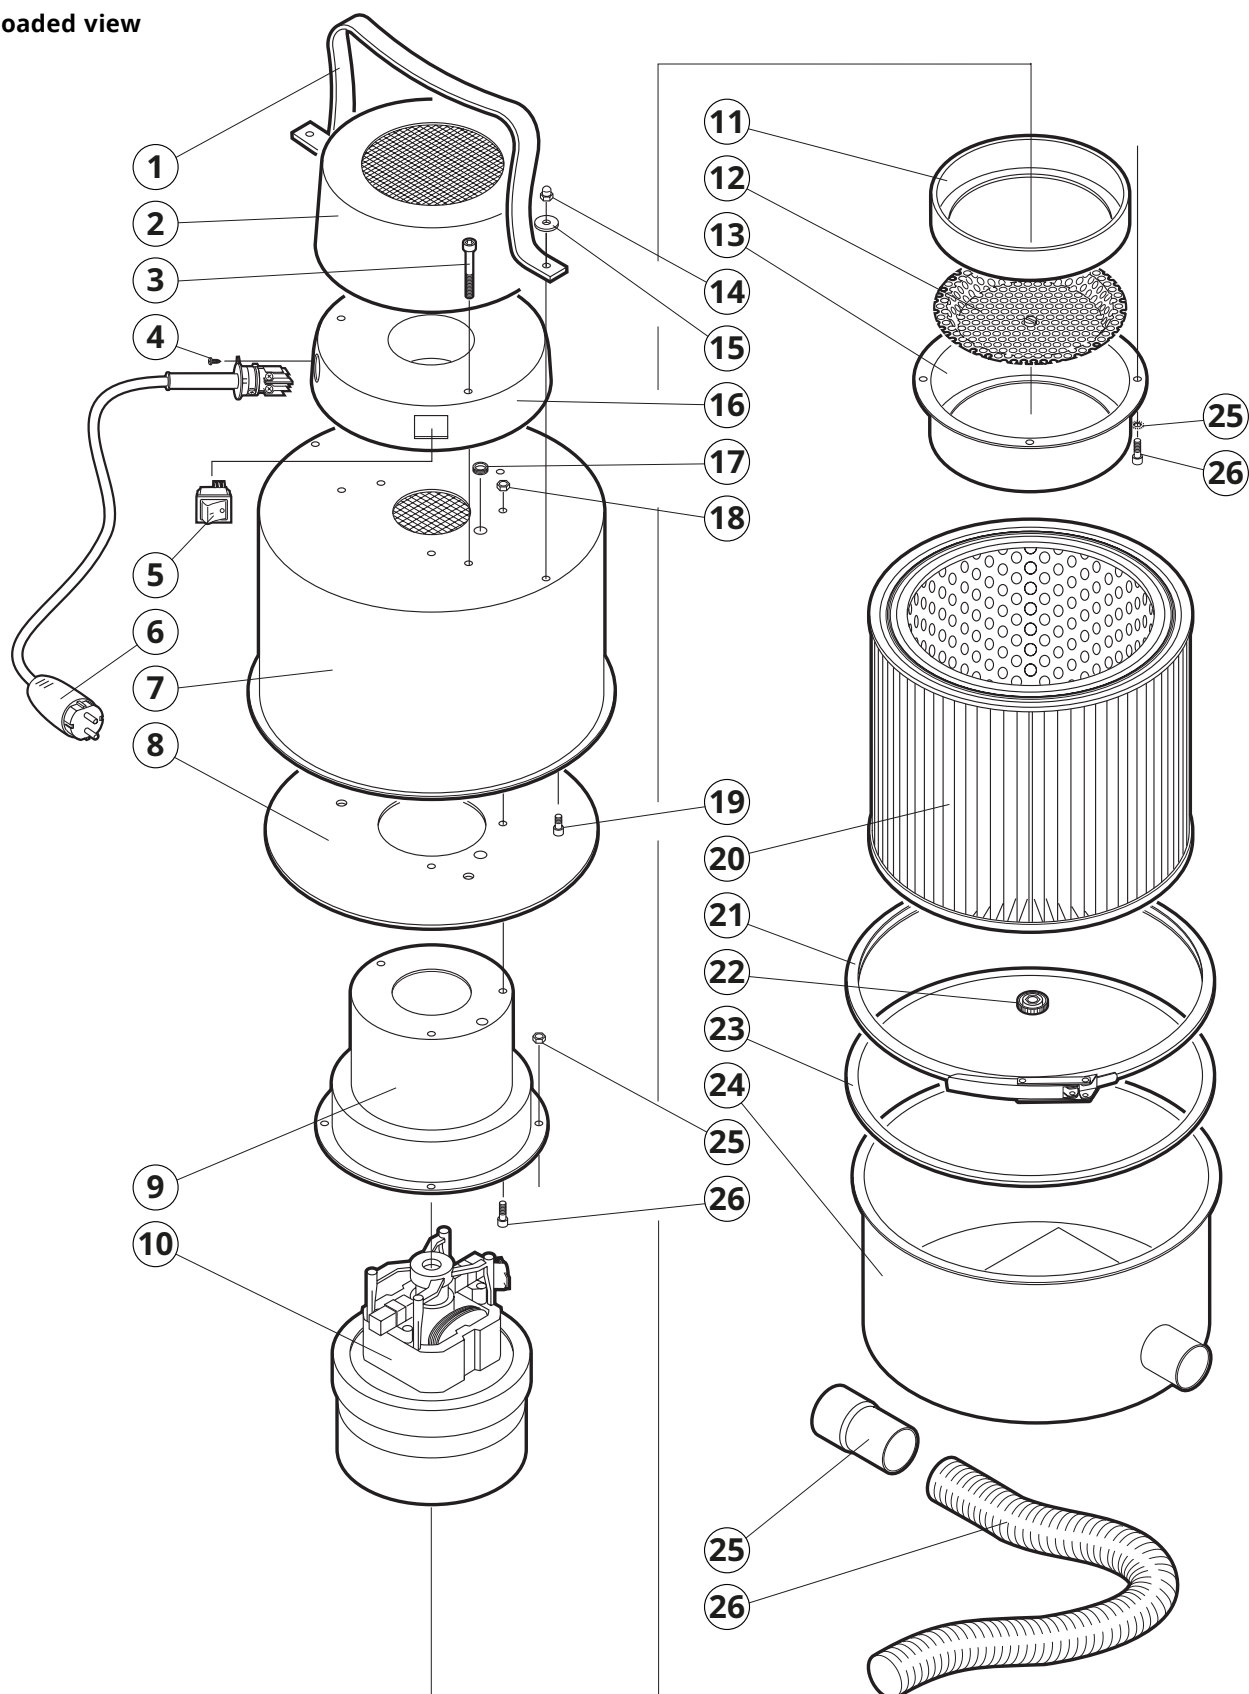

EXTRACTION ARMS • VEHICLE EXHAUST EXTRACTION • FANS • FILTERS • CURTAINS • CONTROLS

MOVEX