

MOVEX®

EXHAUST HOSE



Temperature and chemical resistant lightweight exhaust hose.

These exhaust hoses are specially designed to be flexible with a low pressure drop. They are resistant to chemicals found in diesel and petroleum fumes and able to handle heavy air volumes. All models provide flexibility in small curve radiuses, excellent tensile strength and crack resistant.

The Movex range also includes fans, accessories and filters suitable for extractor points

EXTRACTOR POINT
Pure advantage



Flame-retardant, crush proof hose suitable for vehicle exhaust fumes. Heat-resistant rubberised fabric in EPDM/polyester. Coil in EPDM-coated polyester. For exhaust fume temperatures up to 340 °F. Hose lengths: 8 - 32 feet

Technical data


Dimensions Ø	3"	4"	5"	6"	8"	Hose length.....	8 -32 Feet
Weight.....	0.4	0.6	0.70	0.9	1.2	lb/feet	Temperature range ... -40 °F – +340 °F



Exhaust fume hose suitable for roof-based suspension. Heat-resistant rubberised fabric in EPDM/polyester. Coil in EPDM-coated steel. For exhaust fume temperatures up to 300 °F. Hose lengths: 8 -32 Feet

Technical data

Dimensions Ø	4"	5"	6"	8"	Hose length.....	8 -32 Feet
Weight.....	0.5	0.6	0,75	1	lb/feet	Temperature range ... -40 °F – +300 °F

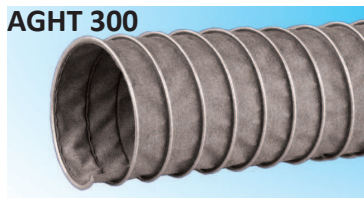

High-quality exhaust fume hose for extra high exhaust stemperatures. Flame-retardant high temperature fabric with external, galvanised steel coil. For temperatures up to 570 °F. Hose length: 8 -32 Feet

Technical data

Dimensions Ø	3"	4"	5"	6"	8"	Hose length.....	8-32 Feet
Weight.....	0.4	0.6	0.7	0.8	1	lb/feet	Temperature range ... -75 °F – +570 °F



Flame-retardant, silicone-coated glass fibre fabric. Double ply with external, galvanised steel coil. For temperatures up to 850 °F. Hose length: 8 -32 Feet

Technical data

Dimensions Ø	3"	4"	5"	6"	8"	Hose length.....	8- 32 Feet
Weight.....	0.7	0.9	0.9	1.2	1.5	lb/feet	Temperature range ... -75 °F – +850 °F



Flame-retardant PU-coated high temperature fabric, double ply. Reinforced with woven-in stainless steel wire. External, galvanised steel coil. For temperatures up to 1200 °F. Hose length: 8 -32 Feet

Technical data

Dimensions Ø	3"	4"	5"	6"	8"	Hose length.....	8- 32 Feet
Weight.....	1.1	1.2	1.4	1.5	2.0	lb/feet	Temperature range ... -75 °F – +1200 °F



Light and flexible silicone hose. Flame-retardant, silicone-coated glass fibre fabric with embedded steel spring coil. For temperatures up to 480 °F. Hose length: 13 Feet

Technical data

Dimensions Ø	3"	4"	5"	6"	8"	Hose length.....	13 Feet
Weight.....	0.4	0.6	0.7	0.8	1	lb/feet	Temperature range ... -95 °F – +480 °F

SG & SGC



SG Hose clamps for fitting exhaust fume hoses suitable for AG, AGT and AGS

Dimensions Ø	3"	4"	5"	6"	8"
--------------------	----	----	----	----	----



SGC Hose clamps for fitting exhaust fume hoses suitable for AGHT

Dimensions Ø	3"	4"	5"	6"	8"
--------------------	----	----	----	----	----