


Installation+



PRX S/LS

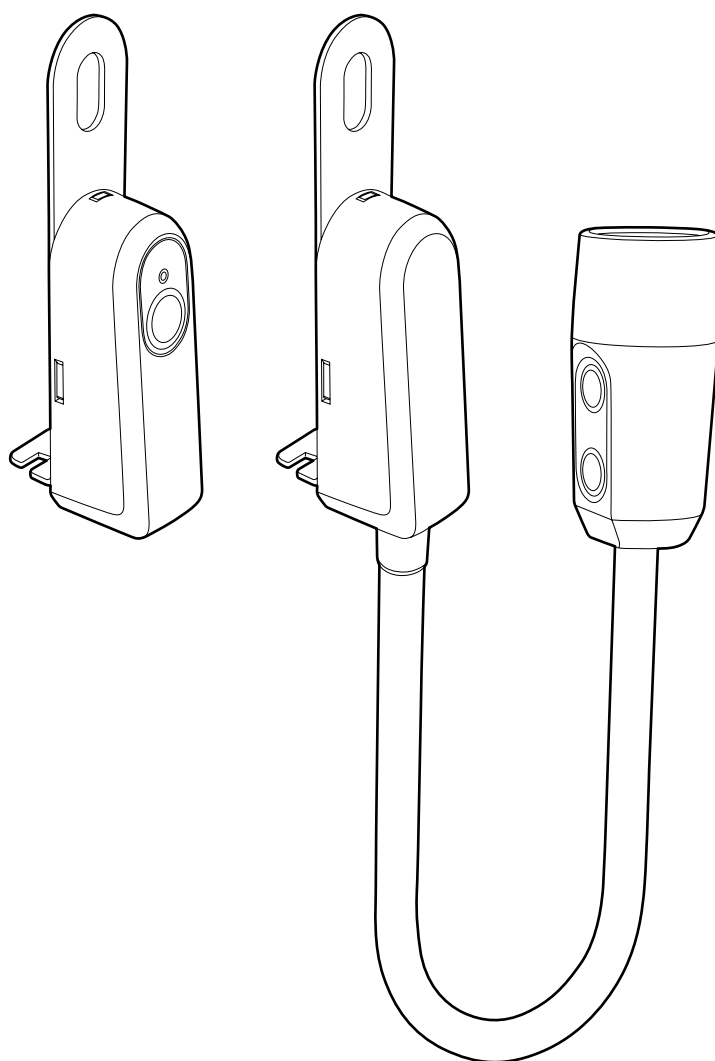

MOVEX
PURE ADVANTAGE

General








Electrical components may only be installed by a qualified electrician.

Push Button Kit **PRX S** and **PRX LS** is developed for easy starting / stopping of example lamp, fan and damper. Power supply via separate transformer or control unit.







Installation

PRX S/LS


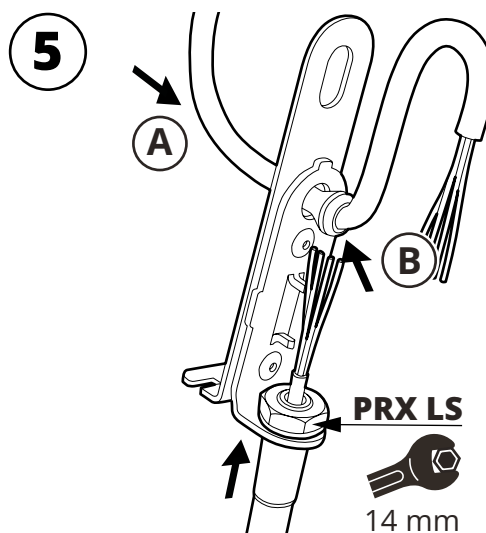
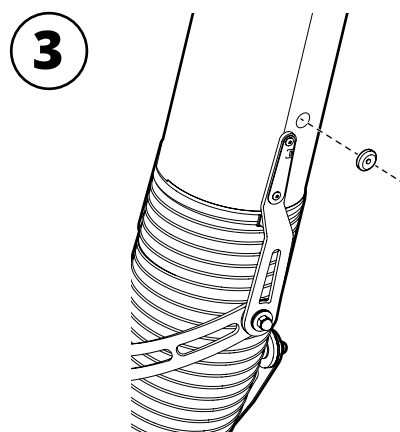
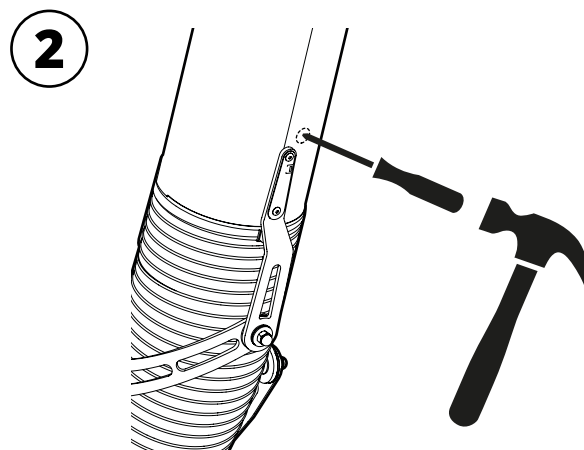
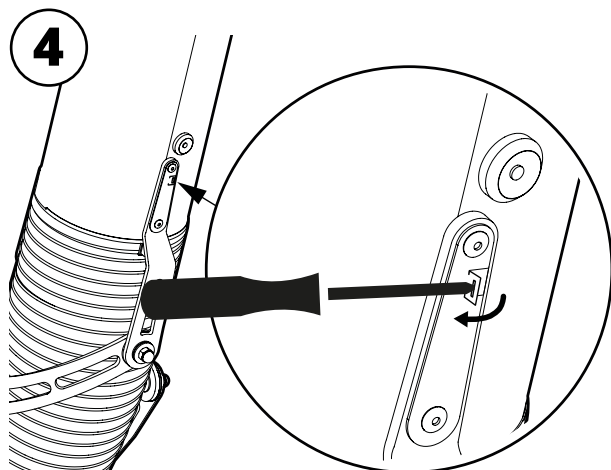
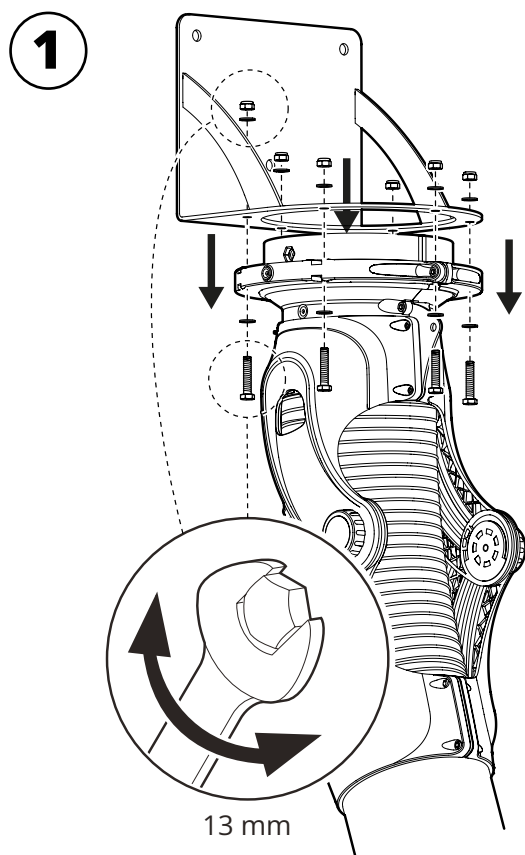






PRX S: See page 3
PRX LS:..... See page 4






PRX S

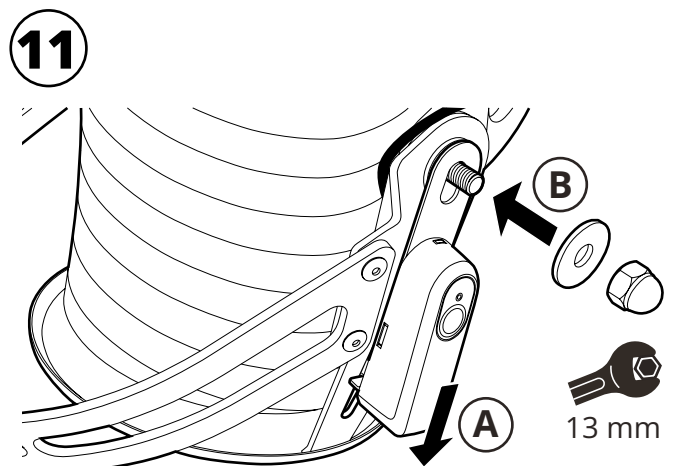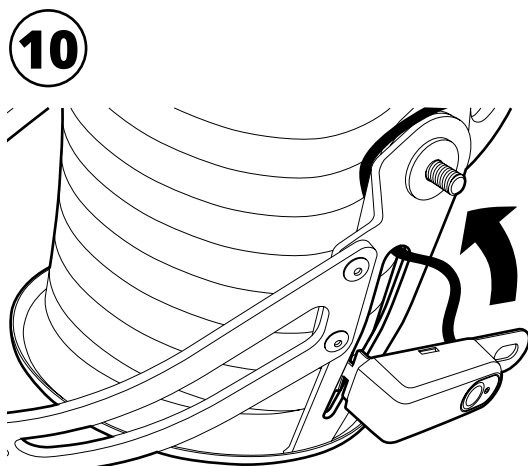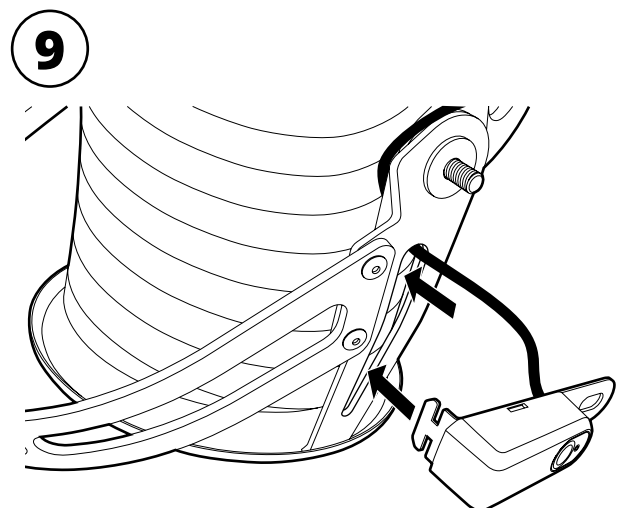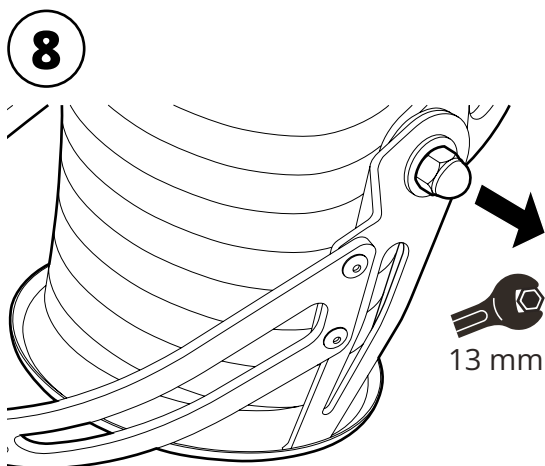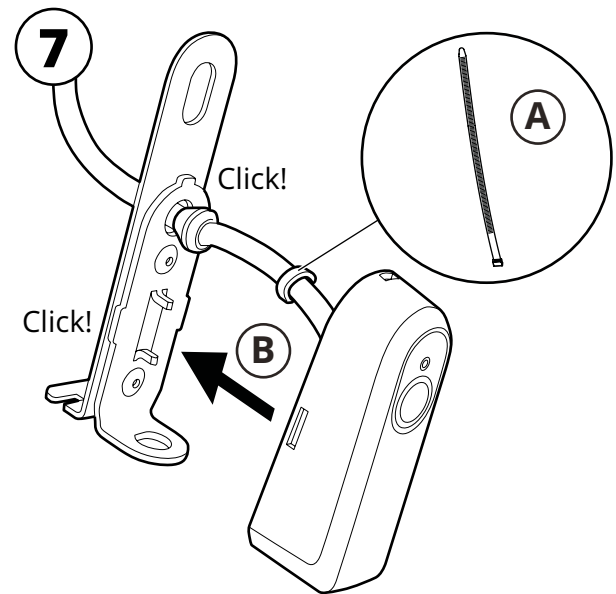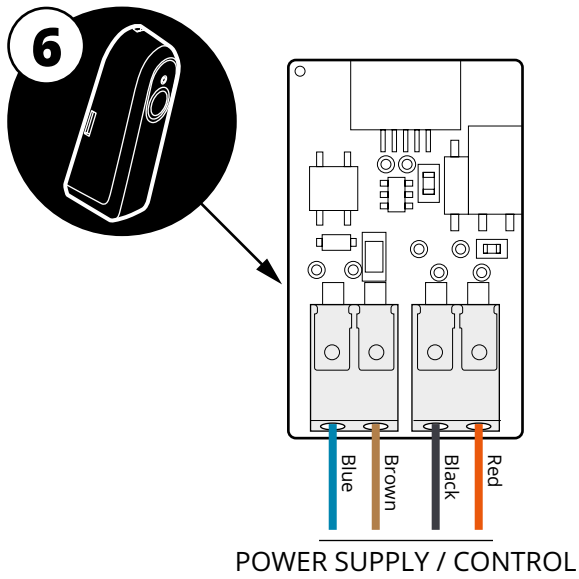

PRX LS

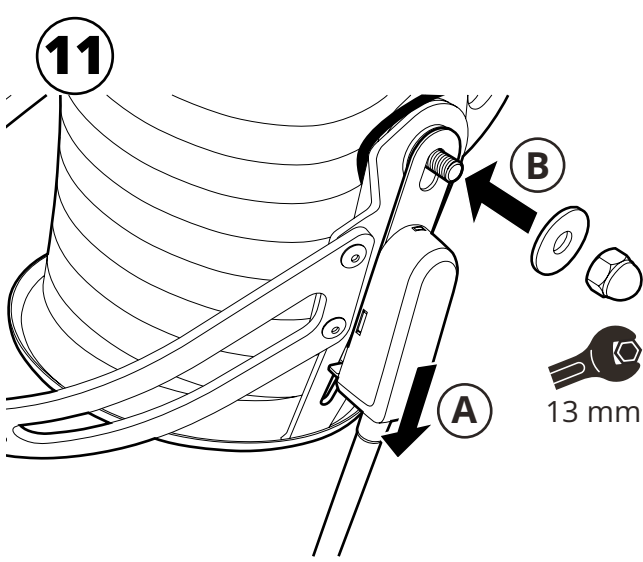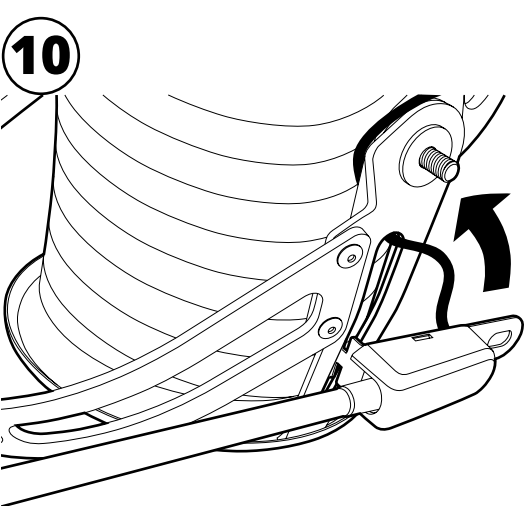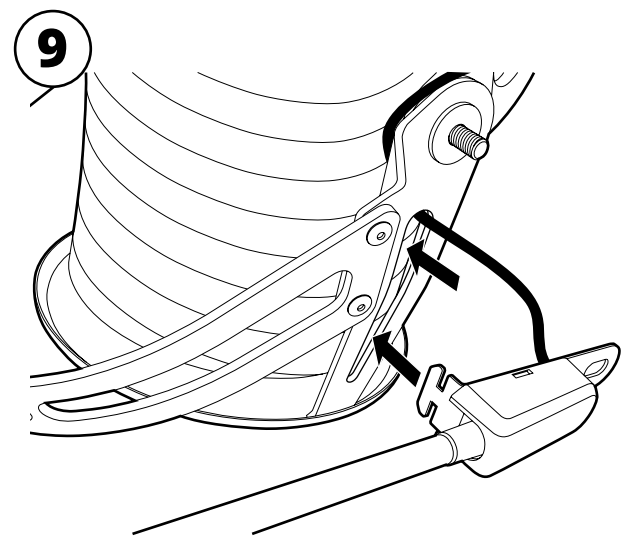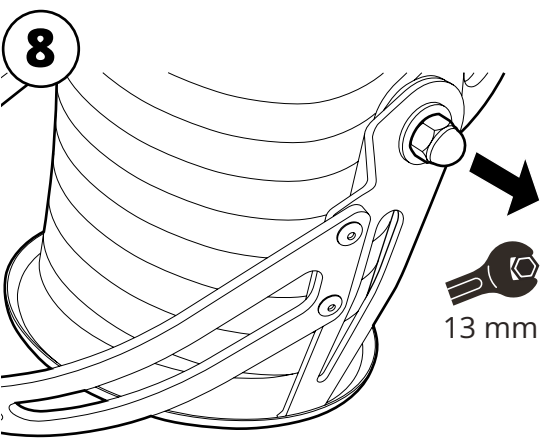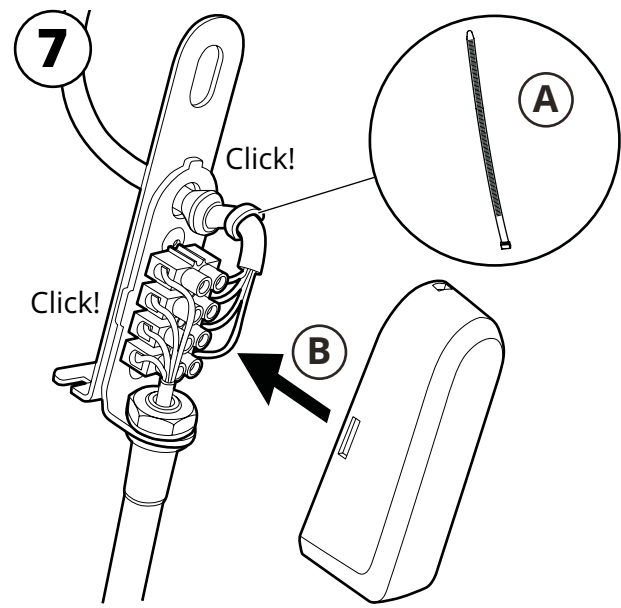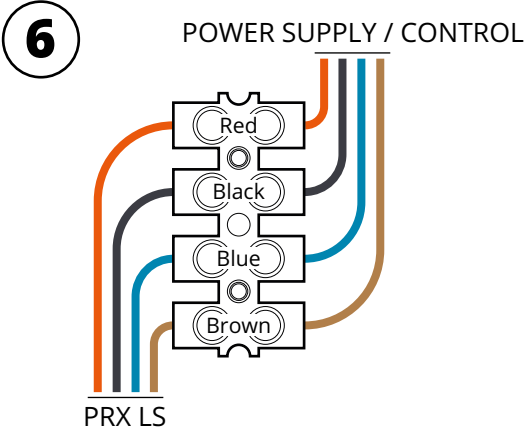


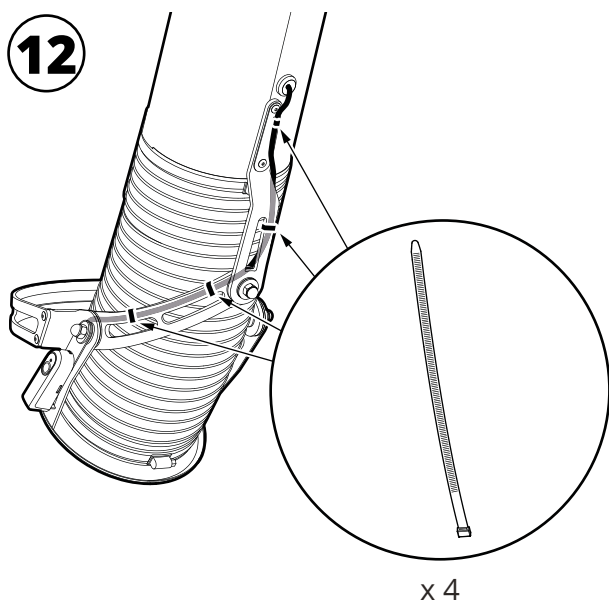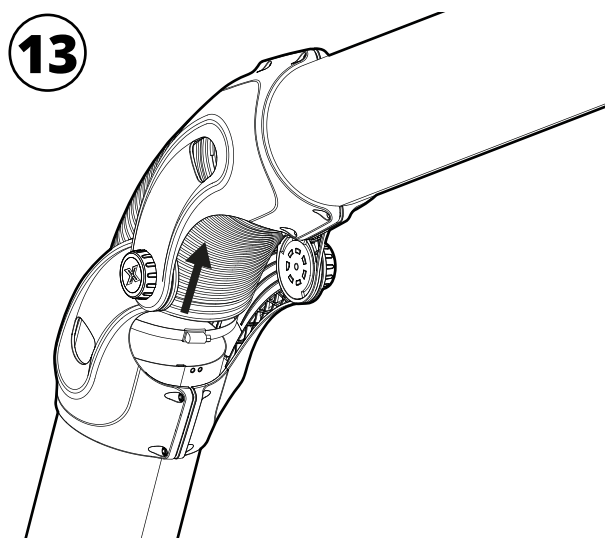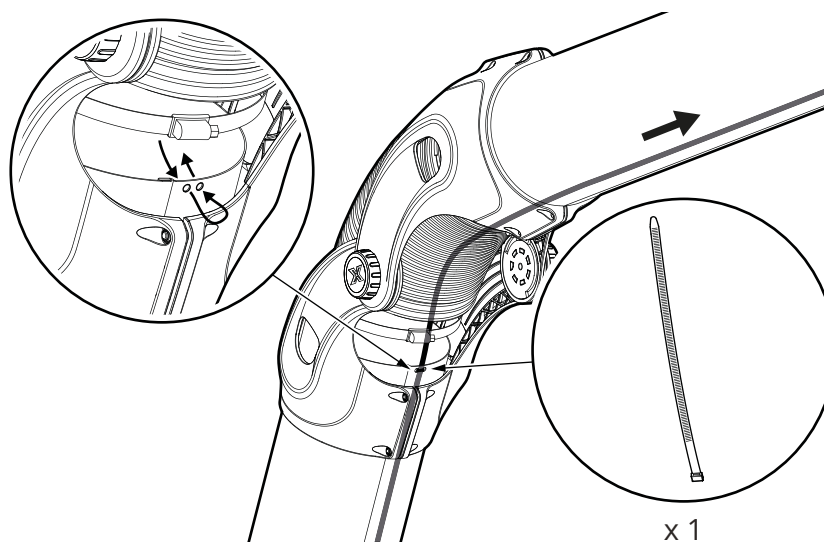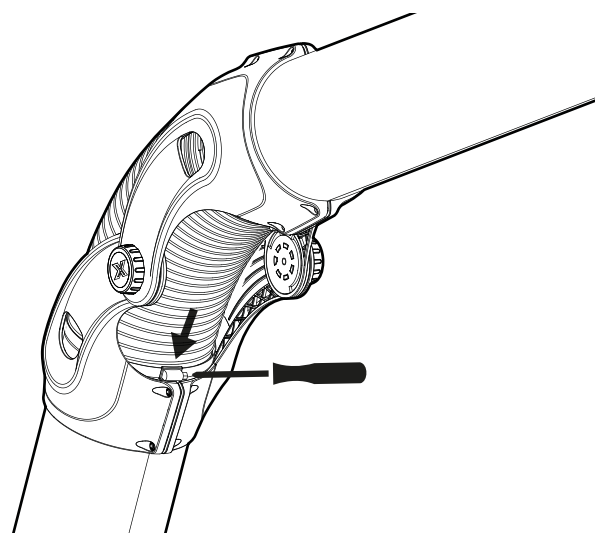PRX S/LS**12****13****14****15**

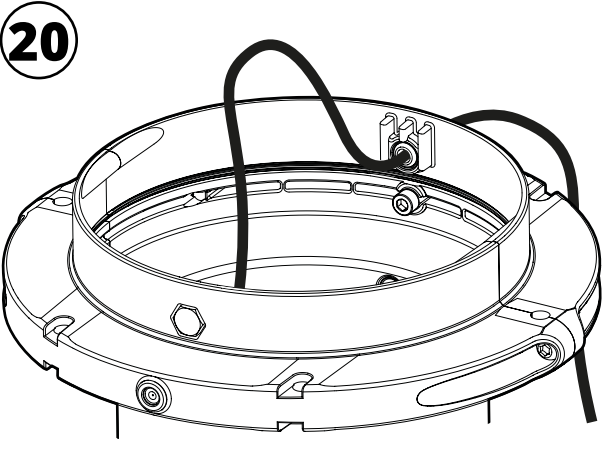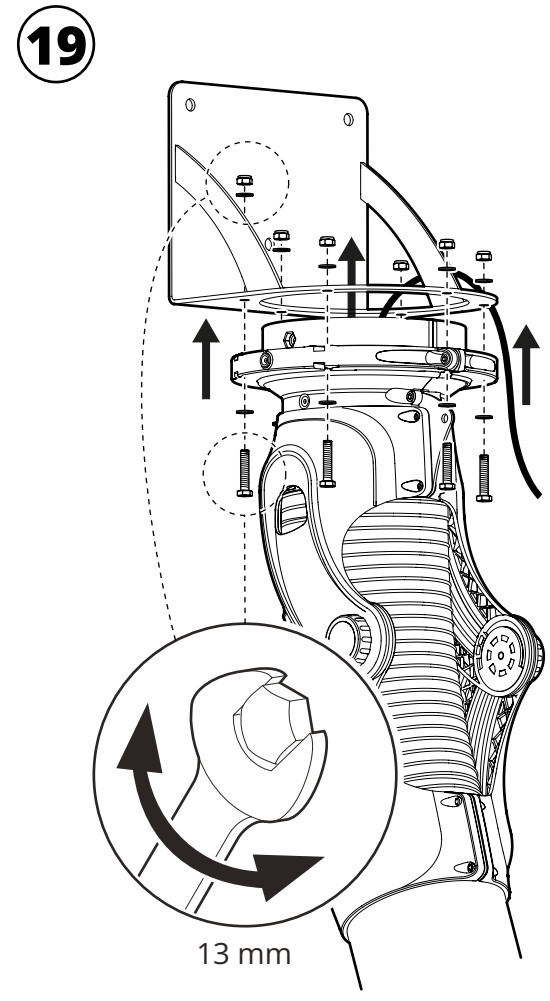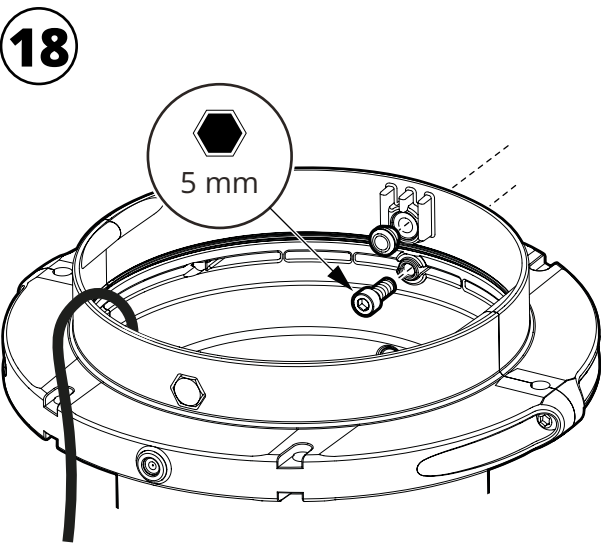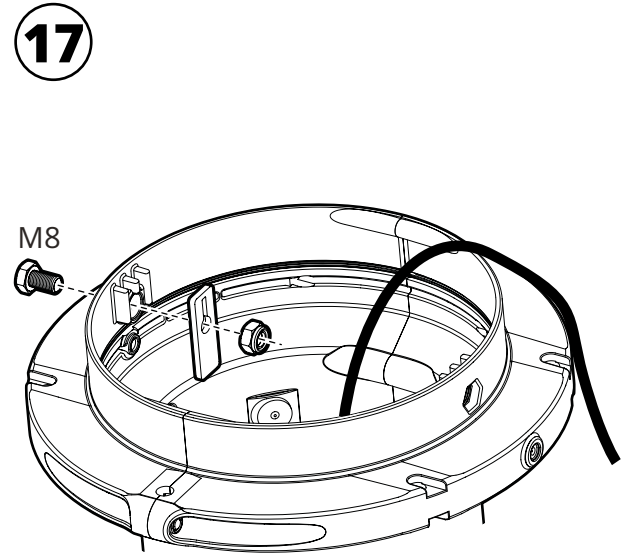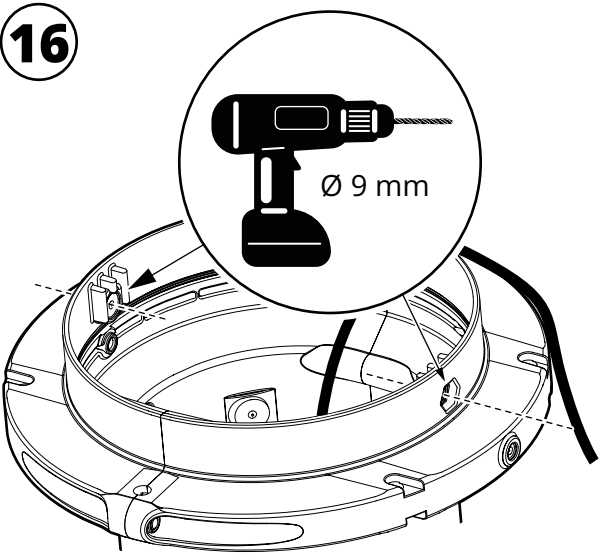


Wiring diagram


ST 24

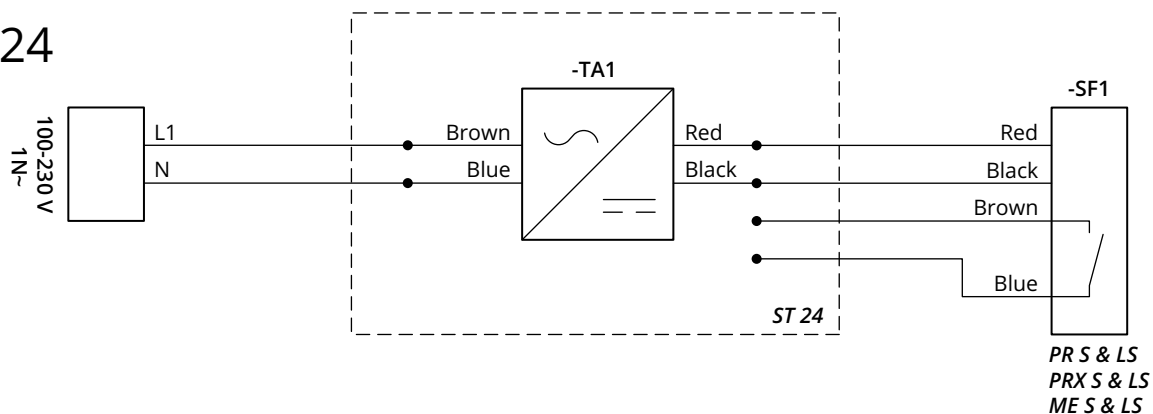

S 200/115V

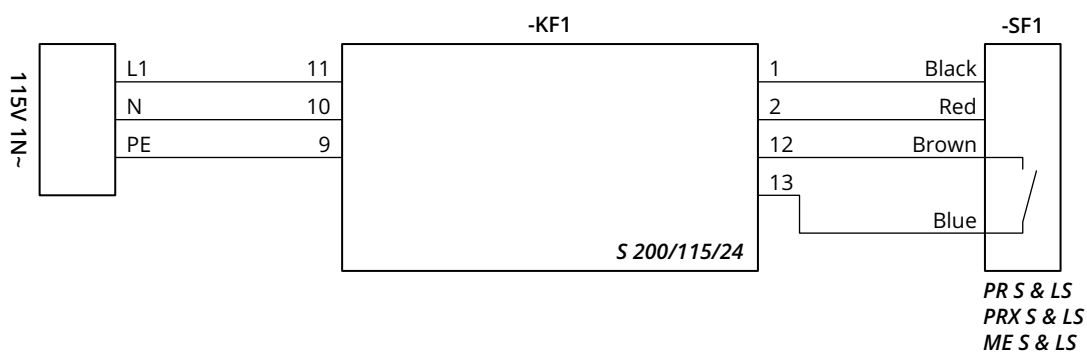

S 400

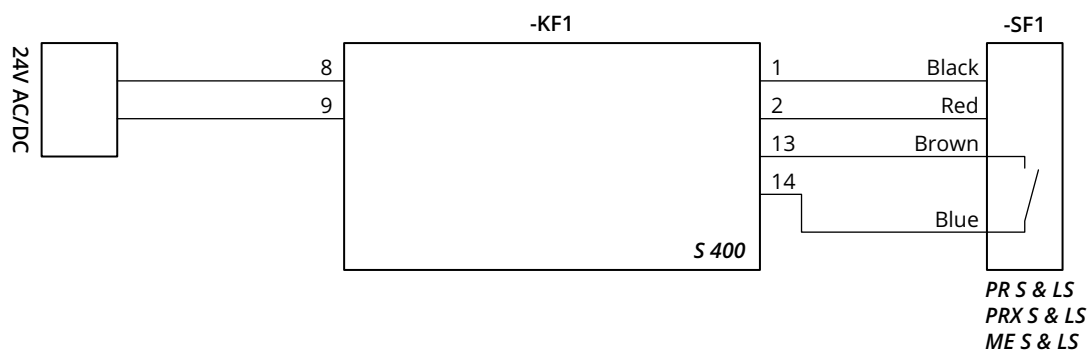

Technical data

PRX S

Installation

Voltage: 24 V AC/DC
Frequency: 50-60 Hz
Ambient temp.: 32 to 122 °F
Weight: 1.9 oz

Meets requirements

EMC: EN IEC 55015:2019
Luminaires - Safety: EN IEC 60598-2-1:2021
Controlgear - Safety: IEC 61347-2-13:2014
RoHS directive: 2011/65/EU

Product

Materials

Housing: PP
Bracket internal: Aluminum
Bracket external: Steel
Dimension: 4 1/4 x 1 x 1 5/8"

Maintenance

Maintenance free

PRX LS

Installation

Voltage: 24 V AC/DC
Power: 5 W
Luminous flux: 500 lm¹
Light exchange: 110 lm/W
Colour temperature: 4000 K
Ambient temp.: 32 to 122 °F
Enclosure class: IP 20
Weight: 9.5 oz

¹ Dimmable 100 - >10 %

Meets requirements

EMC: EN IEC 55015:2019
Luminaires - Safety: EN IEC 60598-2-1:2021
Controlgear - Safety: IEC 61347-2-13:2014
RoHS directive: 2011/65/EU

Product

Materials

Housing: Aluminum
Gooseneck: Stainless steel
Bracket internal: Aluminium
Bracket external: Steel

Dimensions

Housing: Ø3/8 x 3 9/16"
Gooseneck: Ø1/2 x 14 15/16"

Maintenance

Maintenance free

EXTRACTION ARMS • VEHICLE EXHAUST EXTRACTION • FANS • FILTERS • CURTAINS • CONTROLS

MOVEX

104 Commerce Drive, NORTHAMPTON, PA 18067, USA • Tel: 610-440-0478 • Fax: 610-440-0480 • Email: info@movexinc.com
www.movexinc.com